

Item number: 1452672

Instruction manual

Ceiling light McShine

„Star-HF“

for 1x E27, Ø 28 cm, HF motion detector

NE



TECHNICAL DATA

Operating voltage:	180 – 265 V
Frame:	1x E27 (up to 60 W)
Illumination technology:	LED suitable
Outer diameter:	280 mm
Height:	95 mm

HF MOTION DETECTOR (SETTING RANGE)

Detection radius:	3 – 10 m
Activation time:	10 seconds – 15 minutes
Light sensitivity:	10 – 200 lux

Item number: 1452672

EN

SAFETY INSTRUCTIONS

- Before commissioning the device, check for any damage. If this is the case, do not operate the device.
- Please note that any technical modification to the device immediately voids the device's approval!
- Keep the device's user manual.
- When drilling, protect your eyes with safety goggles!
- Wearing gloves is prohibited during drilling!
- The glove could get caught in the rotating drill.
- When working with 230 V, please strictly observe accident prevention regulations.
- Do not short-circuit the connections and circuits.
- Installation must only be carried out by qualified personnel.
- Do not drop the device. It could be damaged upon impact with a hard surface.
- Avoid installation in places with significant temperature differences or high humidity.
- Do not leave packaging materials lying around, plastic sheets/bags, Styrofoam parts, etc., could become dangerous toys for children.
- The device is not for children, it is not a toy!

DISPOSAL INSTRUCTIONS

By separating materials, recycling and disposing of old equipment in this way, you are making an important contribution to protecting our environment.

Packaging can be disposed of free of charge at the appropriate collection points:

- Paper in the paper bin
- Plastics in the yellow bag
- Glass in the used glass container

WEEE DISPOSAL NOTE

According to the European WEEE Directive, electrical and electronic WEEE Directive, electrical and electronic equipment must not be disposed of with household waste. Their components must be recycled or disposed of separately, because toxic and hazardous components can cause lasting damage to health and the environment if disposed of improperly.

As a consumer, you are obliged under the Electrical and Electronic Equipment Act (ElektroG) to return electrical and electronic equipment free of charge at the end of its service life to the manufacturer, the point of sale or to public collection points set up for this purpose.

Details are regulated by the respective state law.

The symbol of the wheeled garbage can on the product, the operating instructions and/or the packaging refers to these regulations.

INTENDED USE


- The product is suitable for indoor use.
- The product may only be used for its intended purpose, as specified in this user manual!
- Only suitable light sources are to be used!

ASSEMBLY

- Turn off the circuit breaker! Verify voltage absence using an appropriate measuring device!
- First, remove the plastic lampshade by turning it.
- Hold the metal housing in the desired position and mark the drill holes. The housing can now be set aside.
- Drill the holes while observing the safety instructions.
- The connecting cable must be passed through the designated hole into the interior of the luminaire.
- The housing can now be mounted to the ceiling/wall using dowels and appropriate screws.
- For connecting the power cable, use the terminal strip provided in the device.
- Please connect the product's power cable to the power cable by following the rule: L to L, N to N, green-yellow to green-yellow.
- Insert a suitable light source into the lamp socket.
- Place and secure the plastic lampshade back onto the housing by turning it.

ADJUSTING THE MOTION SENSOR

- Using the **LUX** rotary switch, you can set the ambient brightness at which the sensor becomes active. If the rotary switch is set to minimum, the sensor operates automatically only at night.
- Using the **TIME** rotary switch, you can set the time interval during which the sensor detects motion. The sensor can be adjusted from 10±5 seconds to 10±2 minutes.
- Using the **SENS** rotary switch, you can adjust the sensitivity of the sensor.

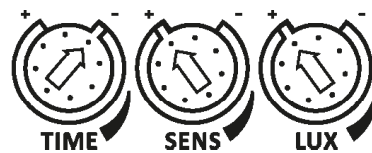

Item number: 1452672

EN

