

Item number: 1530591

Instruction manual

IR motion detector

McShine „LX-119“

180°, 1.200W, IP44, white, LED suitable

NE




TECHNICAL DETAILS

Operating voltage:	220 – 240 V / AC
Range:	max. 12 m
Resistive load consumer:	1 – 1200 W
Inductive load consumer:	1 – 600 W
Connection cables:	3
Standby consumption:	0,071 W
Consumption during operation:	0,155 W
Adjustable switching time:	10 sec - 7 min
Twilight sensitivity:	3 – 2000 Lux
Detection angle:	180°
Dimensions:	90 × 60 × 86 mm
Swivelled:	Ja
Protection class:	IP44


INSTALLATION

- Remove the cover of the sensor by loosening the two upper housing screws.
- Connect the operating voltage as well as the lamp to be switched to the sensor according to the connection diagram shown below.
- Attach the sensor to the wall using the provided screws.
- Reassemble the sensor with the housing screws.

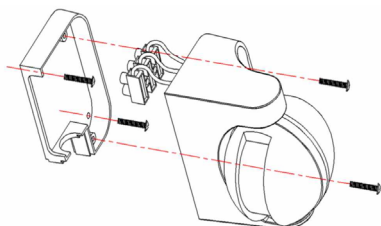


SETTING UP THE MOTION SENSOR

- The activation duration of the lamp after the sensor detects something can be adjusted using the „TIME“ control.
- The switch duration can range from 10 seconds to 12 minutes.
- The light sensitivity of the sensor can be adjusted using the „LUX“ control.
- If set to Sun (bright), the motion sensor is active day and night; if set to Moon (dark), it only responds in darkness. In between, all twilight levels are also selectable.

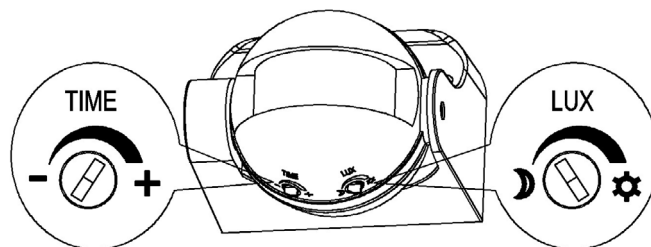

ELECTRICAL CONNECTION

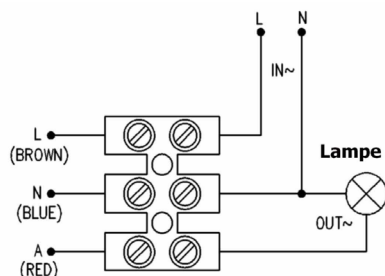

SAFETY INSTRUCTIONS

- Before commissioning, check the device for damage. If this is the case, please do not put the device into operation.
- Please note: If you make any technical modifications to the device, the guarantee of the device will expire immediately.
- Keep the operating instructions of the device.
- Do not drop the device. It could be damaged if it hits a hard surface.
- Avoid installing the unit in places with high temperature differences or high humidity.
- Do not carelessly leave the packaging material lying around, Plastic foils/ bags, polystyrene parts, etc., could become a dangerous toy for children.
- The device does not belong in children's hands, it is not a child's toy!

GENERAL NOTES

- Use only original parts supplied
- The product has no replaceable parts.
- Do not attempt to open or repair the product.

INTENDED USE

- The product is splash-proof, IP44 and suitable for outdoor use.
- If the motion detector is exposed to direct wind and rain water can penetrate the housing.
- The product may only be used for the intended purpose, in accordance with these operating instructions!

CARE INSTRUCTIONS

- Do not use damaged cables. New cables must have the same characteristics as the original.
- Do not connect to power when cleaning.
- Clean only with a soft cloth and neutral detergent. Avoid using alcohol or cleaning agents containing acetone, sulfur, beryllium, ammonia or other solvents.
- Avoid mechanical pressure and heavy contamination.

DISPOSAL INSTRUCTIONS

By separating materials, recycling and disposing of old equipment in this way, you are making an important contribution to protecting our environment. Packaging can be returned to appropriate collection points for free.

WEEE disposal note

According to the European WEEE Directive, electrical and electronic WEEE Directive, electrical and electronic equipment must not be disposed of with household waste. Their components must be recycled or disposed of separately, because toxic and hazardous components can cause lasting damage to health and the environment if disposed of improperly.

As a consumer, you are obliged under the Electrical and Electronic Equipment Act (ElektroG) to return electrical and electronic equipment free of charge at the end of its service life to the manufacturer, the point of sale or to public collection points set up for this purpose.

Details are regulated by the respective state law.

The symbol of the wheeled garbage can on the product, the operating instructions and/or the packaging refers to these regulations.



- DE:** Eine mehrsprachige Version dieser Anleitung und die Konformitätserklärung finden Sie unter folgendem Link:
- EN:** A multilingual version of this manual and the Declaration of Conformity can be found at the following link:
- FR:** Vous trouverez une version multilingue de ce manuel et la déclaration de conformité sur le lien suivant:
- ES:** Encontrará una versión multilingüe de estas instrucciones y de la declaración de conformidad en el siguiente enlace:

<http://ettgroup.de/product/1530591>