

Socket outlet with protective contact McPower „FLAIR“


250V~/16A, flush-mounted, IP44, white

TECHNICAL DETAILS: · Flush-mounted protective contact socket · Flip cover for protection against splashes and dust · 250V~/16A · with child protection shutter · includes frame · WxHxD: 80x80x40mm · suitable for hollow wall boxes with 68mm-Ø · compatible with Flair multiple frames

SAFETY INSTRUCTIONS: Keep the user manual for the device. Regularly check the device for damage. Do not modify the product or its accessories. Do not insert objects into the connection sockets. The product is only suitable for use in protected outdoor areas. Do not short-circuit the connections. Only use the product when it is in perfect condition. Do not use a defective device under any circumstances! The device must not be altered in any way. Risk of electric shock and accident! Avoid extreme conditions such as extreme heat or cold, moisture, microwaves, mechanical pressure, and vibrations. Avoid overloading the socket: Do not connect multiple high-current devices simultaneously. Overloaded sockets can lead to overheating and fire hazards. **Disconnect from the power supply before connecting. Electrical work, installation, and repairs should only be performed by qualified electricians. Avoid inserting metallic objects or fingers into the socket to prevent short circuits or electric shocks - DANGER TO LIFE!** Wipe the device only with a soft, dry cloth. Do not use scouring powder or chemical cleaning agents. Electrical components must not come into contact with moisture. Do not bend, pinch, clamp, or otherwise damage the cables. If you have any questions, defects, mechanical damage, or other problems, please contact the dealer or manufacturer. If you have doubts about the safety of the socket or if it does not function properly, have it inspected and, if necessary, repaired by a qualified electrician. The product is not a toy and should not be handled by children! Please note that the product, as well as packaging, plastic films/bags, Styrofoam parts, etc., can become dangerous toys and pose a hazard to children.

ASSEMBLY

1. Switch off the fuse and check that there is no voltage. 2. Strip approx. 10 mm of insulation from the wire ends. 3. Remove the cover. 4. The connections are labelled „L“, „N“ and „ \perp “. 5. Insert the wires into the screw connections as follows: brown/black wire in „L“; blue wire in „N“; green/yellow wire in „ \perp “. Make sure that no wires are pinched incorrectly and that no strands protrude or stick out. 6. Insert the socket outlet into the flush-mounted box and screw the fixing claws tight. 7. Insert the socket cover into the frame and screw the socket cover hand-tight into the flush-mounted box using the screw in the centre.

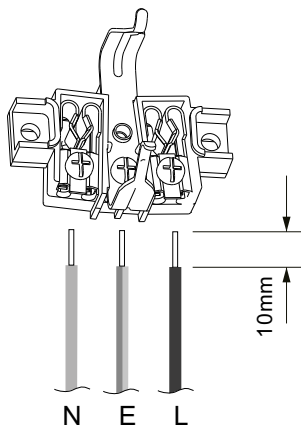

DISPOSAL INSTRUCTIONS: By separating, recycling and disposing of old appliances in this way, you are making an important contribution to protecting our environment. Packaging can be disposed of free of charge in accordance with local regulations at the appropriate collection centres. According to the European WEEE Directive, electrical and electronic appliances may not be disposed of with household waste. Their components must be recycled or disposed of separately, as toxic and hazardous components can cause lasting damage to health and the environment if disposed of improperly. As a consumer, you are obliged under the German Electrical and Electronic Equipment Act (ElektroG) to return electrical and electronic equipment free of charge at the end of its life to the manufacturer, the point of sale or to public collection centres set up for this purpose. Details are regulated by the respective state law. The wheeled bin symbol on the product, operating instructions and/or packaging indicates these regulations.



DE: Eine mehrsprachige Version dieser Anleitung und die Konformitätserklärung finden Sie unter folgendem Link:

EN: A multilingual version of this manual and the Declaration of Conformity can be found at the following link:

FR: Vous trouverez une version multilingue de ce manuel et la déclaration de conformité sur le lien suivant:

ES: Encontrará una versión multilingüe de estas instrucciones y de la declaración de conformidad en el siguiente enlace:

<http://ettgroup.de/product/1535112>