
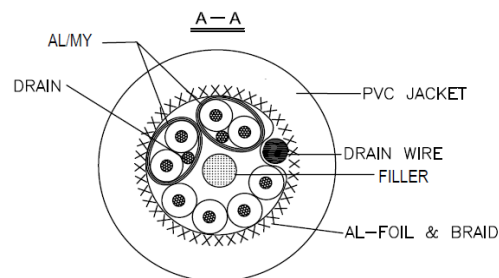


REVISED	DR	APP

PIN ASSIGNMENT:

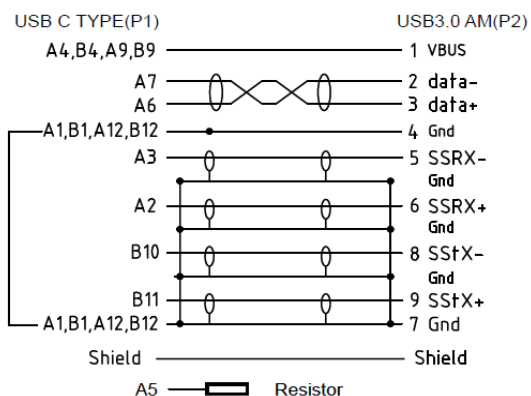

NOTES:

- Electrical properties:
 - Testing: 100% Open and short and miss wire test.
 - Compliant with USB3.0, USB2.0, USB1.1.
 - Plug & Play, no driver required.
 - Supports Win XP/VISTA/7/8/8.1/10
- ROHS 2.0 and REACH

- Connections: USB 3.0 A plug to USB 3.1 C plug
- USB Standard: USB 3.0
- max. transmission rate: 5 Gbit/s
- Cover: moulded
- Shielding: Braid and Foil
- Wire material: tinned copper
- Plug material: iron
- Contact surface: nickel-plated-plated
- Color plug/ cable: black/black
- USB Type C reversible plug
- with 56 Kilo Ohm resistor

⑥	CABLE	[28AWG*1P+(28AWG)+FAM]*2PCS+28AWG*1P+26AWG*2C+AEB OD:5.0±0.15mm BLACK PVC JACKET	L
④	MOLD HOOD	BLACK PVC	1
③	MOLD HOOD	BLACK PVC	1
②	CONNECTOR	USB3.1 TYPE C MALE, NICKEL PLATED	1
①	CONNECTOR	USB 3.0A MALE, NICKEL PLATED	1
No.	PART NAME	DESCRIPTION	QTY



RoHS
compliant



DESCRIPTION

USB CABLE, 3.1 (C) PLUG - 3.0 (A) PLUG

SIZE	A4	DATE		CHECKED		TOL	
UNIT	MM	DRAWN		APPROVED			
CUSTOM TARIF NO.: 854442909000							77141