


PIN ASSIGNMENT:

USB C TYPE(P1) USB2.0 AM(P2)

USB C TYPE(P1)	USB2.0 AM(P2)
A1,B1,A12,B12	4 GND
A4,B4,A9,B9	1 V+
A6	3 D+
A7	2 D-
Shell	Shell Shldd
A5	Resistor

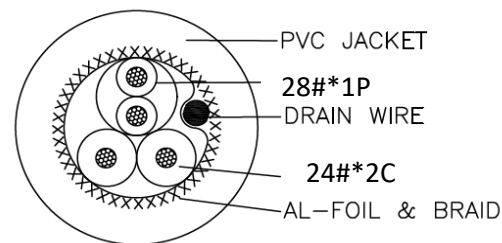

NOTES:

- 1.Electrical properties:
 - 1.Testing:100%Open and short and miss wire test.
 - 2.Compliant with USB2.0,USB1.1.
 - 3.Plug &Play,no driver required.
 - 4.Supports Win XP/VISTA/7/8/8.1/10
- 2.ROHS 2.0 and REACH

- Connections: USB 2.0 A plug to USB 3.1 C plug
- USB Standard: USB 2.0
- Transmission rate: 480 Mbit/s
- Cover: moulded
- Shielding: Braid and Foil
- Wire material: Tinned Copper
- Plug material: iron
- Contact surface: nickel-plated
- Color plug/ cable: black/black
- USB Type C reversible plug
- With 56 Kilo Ohm resistor

⑥	CABLE	28AWG*1P+24AWG*2C+AWB OD:5.0±0.15mm BLACK PVC JACKET	L
④	MOLD HOOD	BLACK PVC	1
③	MOLD HOOD	BLACK PVC	1
②	CONNECTOR	USB3.1 TYPE C MALE,NICKEL PLATED	1
①	CONNECTOR	USB 2.0A MALE ,NICKEL PLATED	1
No.	PART NAME	DESCRIPTION	QTY



 S-Conn Handels GmbH
Am Mühlberg 8
91477 Markt Bibart
Tel. 09162/ 98 93 8-0
Fax 09162/ 98 93 8-20
info@s-conn.de

S/CONN
maximum connectivity www.s-conn.de

DESCRIPTION		USB CABLE, 3.1 (C) PLUG - 2.0 (A) PLUG					
SIZE	A4	DATE	02.03.2022	CHECKED		TOL	77143
UNIT	MM	DRAWN		APPROVED			
CUSTOM TARIF NO.: 854442909000							