

SLI035037WW_PW


SLI035037WW_PW



Power	45 W	Voltage	230 V
Luminous flux*	5850 lm (360°)	Colour temperature	3000 K
Colour of light	WW	Beam angle	120 °
IK	06	Degree of protection (IP)	IP20

Technical data

Code	SLI035037WW_PW
Power	45 W
Nominal current	200 mA
Voltage	230 V
Energy consumption	45 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.95
Useful luminous flux*	5850 lm (360°)
Luminous flux**	4400 lm (360°)
Lamp efficacy	130 lm/W
Colour temperature	3000 K
Colour of light	WW
Beam angle	120 °
RA	>80
Uniformity of color SDCM max	3
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Aluminum, PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	595x595x10 mm
Mounting hole	575x575 mm
For use	Inside
Assembly method	Recessed, On the ceiling, zwieszany
Application	INT
Made in	PRC
Other	L80B50 50000h MTBF 80000h ,

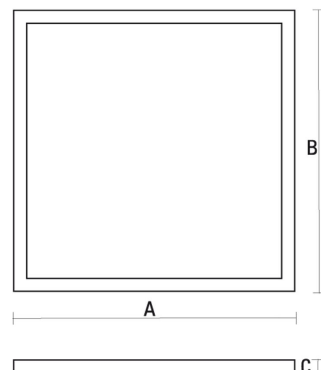

Related documents

 User manual Declaration of Conformity Photometric file

