

PLATEO SUN 4

SLI044033NW_PW

High bay luminaire PLATEO SUN 4, with a power of 205 W, high light efficacy 110 lm/W. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. It shines with light of neutral - the most universal colour (4000K). Narrow beam angle 70° gives directional light so that selected surfaces can be better exposed. Designed for suspended mounting.

IP65

IK06




Power	205 W	Voltage	230 V
Luminous flux*	22600 lm (360°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	70 °
IK	06	Degree of protection (IP)	IP65

Technical data

Code	SLI044033NW_PW
Power	205 W
Nominal current	920 mA
Voltage	230 V
Energy consumption	205 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power factor	0.9
Useful luminous flux*	22600 lm (360°)
Luminous flux**	20500 lm (360°)
Lamp efficacy	110 lm/W
Luminous intensity	14000 cd
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	70 °
RA	>80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Lifespan	17000 h
Housing material	Aluminum / PC
IK	06
Degree of protection (IP)	IP65
Colour	Black
Dimension (AxBxC)	303x90 mm
For use	Outside
Assembly method	Suspended
Application	Outside
Made in	PRC

Logistics data

Bulk packaging	5 pcs.
Quantity per pallet	225 pcs.
Gross weight (1 pcs.)	1.38 kg

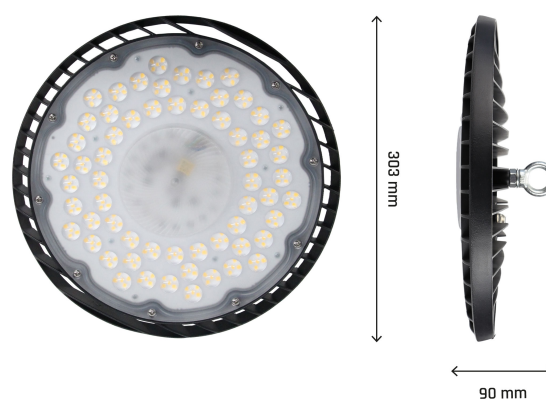

Related documents

 User manual Declaration of Conformity

