


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
1*2	B	EGR #110112-3 ADD POLYBAG,LABEL,EAN CODE	01/12/11'

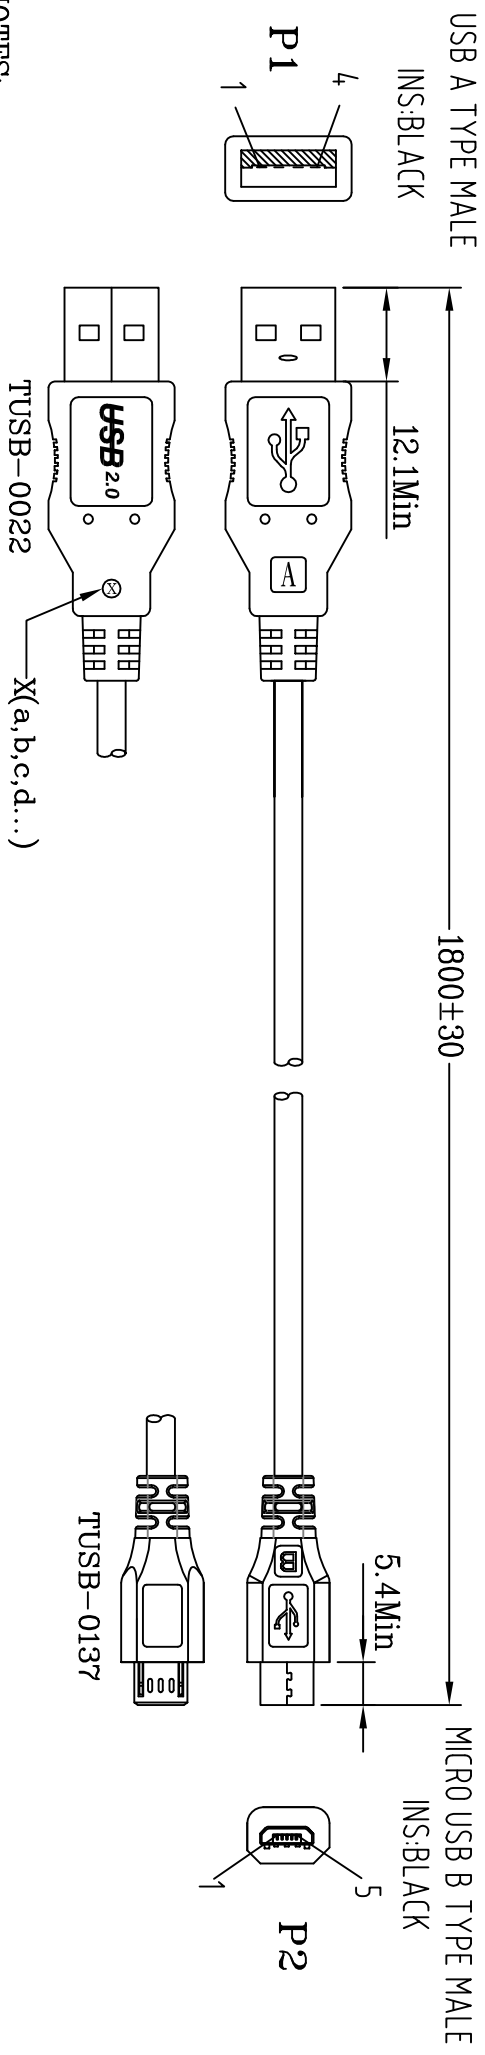

NOTES:

1. CABLE: UL-2725 [28AWG(7/0.127 T.C)*1P INS: HD-PE ID: 0.8±0.05 +28AWG(7/0.127 T.C)*2C INS: PP ID: 0.63±0.05+AL-FOIL/MYLAR +DRAIN WIRE(7/0.127 T.C)+BRAID 85%] PVC JACKET OD: 3.8±0.15mm COLOR: BLACK(NK-K01) REV 2.0.(C2725695-1)
2. CONNECTORS:
 - P1: USB A TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
 - P2: MICRO USB B TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.

PIN OUT

P1	P2
RED 1	1 VBUS
WHITE 2	2 D-
GREEN 3	3 D+
BLACK 4	5 GND
SHELL	BRAID
	SHELL

3. HOOD: MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)
4. TEST REQUEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST.
- <2>.CONTACT RESISTANCE 3 Ohm MAX
- <3>.INSULATION RESISTANCE 10M Ohm MIN.
5. PACKING: SEE P-0210

- <1>EACH PC / POLYBAG + EAN CODE LABEL
- <2>EACH CARTON / ROHS LABEL(L*W=35*22mm)
6. EAN CODE: 4260113573778


Tolerance Inch	M/M		
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
Draw	Title		
FANNTIE 01/12/11'	USB A/M - MICRO USB B/M CABLE		
Customer P/N: CU0034	Customer: E-DIR		
Check	App' d		
Engr	Scale NONE	Units m/m	Third Angle Projection
Dwg. No. 170-4025	REV: B	Sheet 1/2	

2DIRECT GMBH



LTR	REV.	DESCRIPTION	DATE
1*2	B	ECR #110112-3 ADD POLYBAG,LABEL,EAN CODE	01/12/11'

POLYBAG

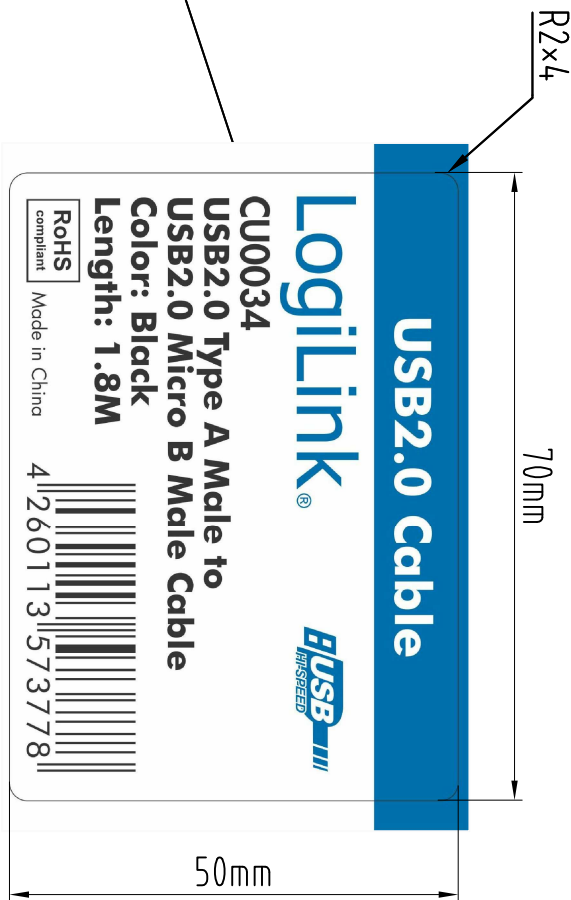

LABEL: PANTONE 2945C

LABEL POSITION IN THE MIDDLE

Tolerance Inch	M/M	Title	
.X	.015	2DIREKT GMBH	
.XX	.010	USB A/M - MICRO USB B/M CABLE	
.XXX	.005	Customer P/N: CU0034	
Draw	.05	Customer: E-DIR	
FANIE 01/12/11'		App'd	
Check		Scale NONE	
Engr		Units	Third Angle Projection
Dwg No. 170-4025		REV: B	Sheet 2/2