



	REVISED	DR	APP

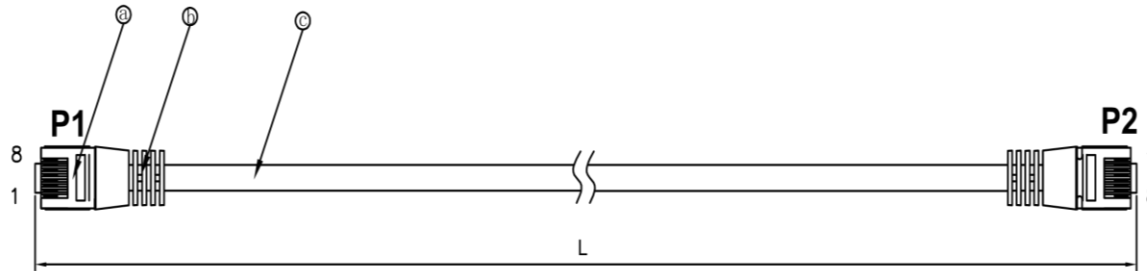


Note: (Colour Codes)

Blue	RAL 5005
Yellow	RAL 1003
Red	RAL 3020
Green	RAL 6024
White	RAL 9003
Black	RAL 9005
Grey	RAL 7044 (standard)

Electrical character:
1.100% Open/short/Intermittent testing
2.TEST FLUKE CHANNEL PASS

P1	Wiring Diagram	P2
1		1 white
2		2 orange
3		3 white
6		6 green
4		4 blue
5		5 white
7		7 white
8		8 brown

Length
0.3m+/-10mm
0.5m+/-10mm
1m+/-15mm
1.5m+/-20mm
2m+/-30mm
3m+/-50mm
5m+/-80mm
7m+/-100mm
10m+/-150mm

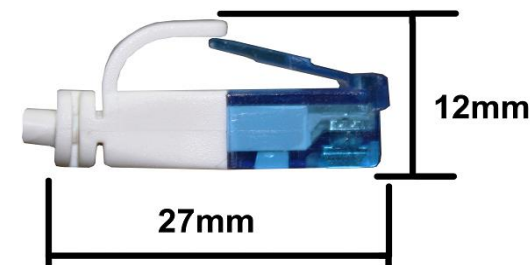

11,65mm



1	CABLE	CAT 6 250 MHz. U/UTP AWG 30/7 (7/0.10BC) x 4P, PVC OD:3.5 +/- 0.15mm
2	CONNECTORS	SHORT RJ45 8P8C FU" (COLOR: BLUE)
3	MOLDING	PVC 75A
NO	IMPRINT	

IMPRINT: CAT6 SLIM LINE PATCH CORD 250Mhz STRANDED COPPER WIRE 4PAIRS 30AWG



DESCRIPTION		CAT 6 PATCH CABLE, RJ45, UTP, SLIM				
SIZE	A4	DATE		CHECKED		TOL
UNIT	MM	DRAWN		APPROVED		
CUSTOM TARIF NO.: 85444210000						08-22300