


	REVISED	DR

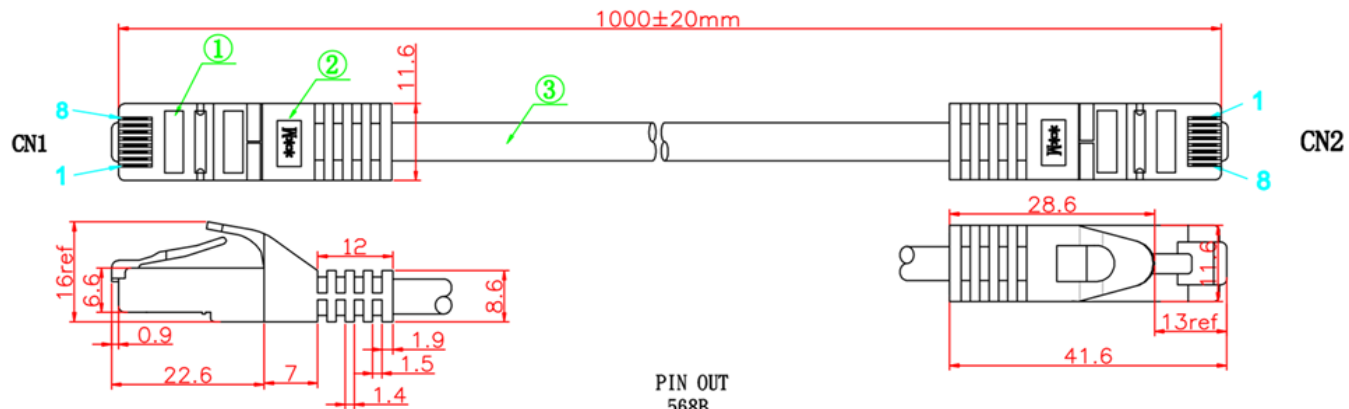

PIN OUT		568B	
CN1		CN2	
WH/OG	1	1	WH/OG
OG	2	2	OG
WH/GN	3	3	WH/GN
GN	6	6	GN
BU	4	4	BU
WH/BU	5	5	WH/BU
WH/BN	7	7	WH/BN
BN	8	8	BN
SHELL		SHELL	

Note: (Colour Codes)

Blue	RAL 5005
Yellow	RAL 1003
Green	RAL 6024
Red	RAL 3020
Black	RAL 9005
White	RAL 9003
Orange	RAL 2007
Grey	RAL 7044 (standard)

- confected Rawcable Cat 7, 600 MHz, S/FTP, PIMF, halogenfree
- Cat 7 tested up to 600 Mhz
- Connections: Cat. 6A (downforced), (500Mhz) RJ45 Plug - RJ45 Plug
- Occupancy: TIA/EIA 568B
- Structure Shielding: Alu Foil 0,025mm/ 80x0,12mm
- Construction: AWG 26/7
- Wire Material: copper
- Plug Material: gold plated 3µ

NOTES:
 1:100% short,open and miss wire test.
 2:Cable marking:S/FTP CAT7 600MHz Patch-Cable --- 4x2xAWG26 - LSZH

Cable must PASS Fluke Test

3	Imprint	S/FTP CAT 7 RAW 600MHz Patch-Cable ---4x2xAWG 26
2	Connectors	RJ45 CAT6A 3U" Gold Plated, molded with METERMARKING
1	Cable	Braiding 80x0,12mm Aluminium - AWG26/7 CU = 7x0,16 - each pair with Alufoil shielded, OD = 6,5mm - LSZH - all colours RAL code
NO	PARTS	DESCRIPTION



DESCRIPTION		S/FTP CAT 7 600MHz Patch-Cable ---4x2xAWG 26 LSZH					
SIZE	A4	DATE		CHECKED		TOL	75511
UNIT	MM	DRAWN		APPROVED			
CUSTOM TARIF NO.: 85444210000							